


View A - A:

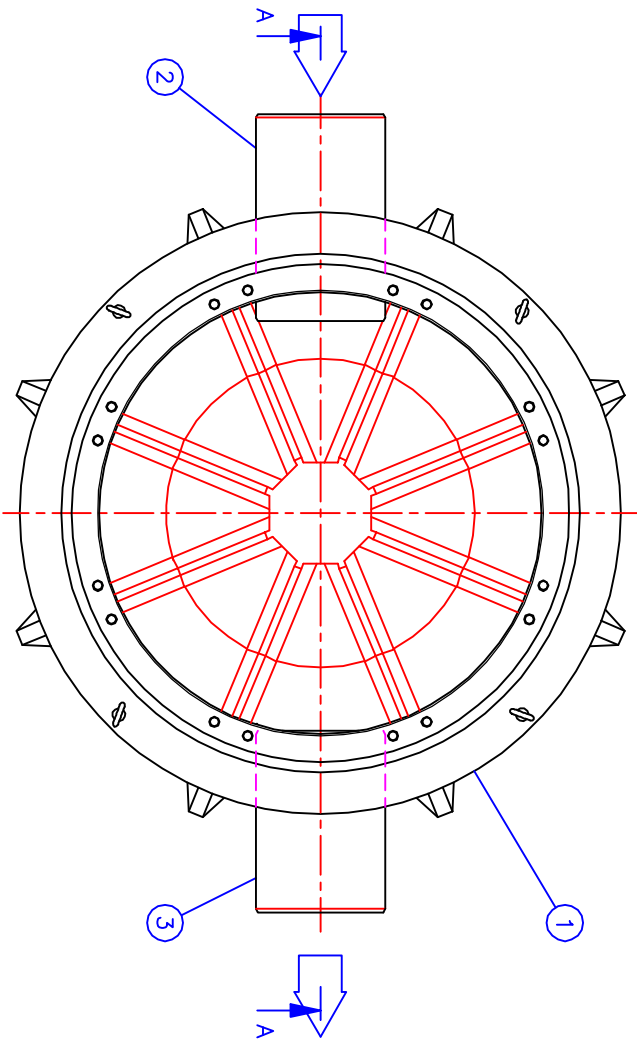

**Notel Sampling shaft without manually operated shut-off valve**

h = Separator connection height from ground (max. 2500 mm)

h = \_\_\_\_\_ mm

6	ACCESSORY: Floating adjustable cover $\varnothing$ 600, Standard EN124 (1 pc.)				
	Cover class A15 (1.5 tn) (x)	<input type="checkbox"/>			
	Cover class C250 (25 tn)	<input type="checkbox"/>			
	Cover class D400 (40 tn)	<input type="checkbox"/>			
	Frame	<input type="checkbox"/>			
5	EuroHUK 600 maintenance shaft (as needed), material: PE-MD				1
	h = Separator connection height from ground (max. 2500 mm)				
	EuroHUK 600 h 9-13 (x)	<input type="checkbox"/>	PE-MD	h = 900...1300 mm	
	EuroHUK 600 h13-17	<input type="checkbox"/>	PE-MD	h = 1300...1700 mm	
	EuroHUK 600 h17-21	<input type="checkbox"/>	PE-MD	h = 1700...2100 mm	
	EuroHUK 600 h21-25	<input type="checkbox"/>	PE-MD	h = 2100...2500 mm	
4	Ventilation outlet (as needed)		PE	D110	1
3	Outlet sewer		PE-HD	D250	1
2	Inlet sewer		PE-HD	D250	1
1	Material: PE-MD		PE-MD	$\varnothing$ 1160, H=800 mm	1
	pH3-10/Heat endurance 50°C			V = 200 l	

Product: EuroNOK PE Nordic DN250 Sampling shaft

Title: CUSTOMER DRAWING

Design by: AL/JS Checked by: JP Approved by: JP Drawing no. 40MB12\_e Date: 15.10.10 Scale:

This drawing and the technical information included in the drawing are property of Wavin-Labbko. All the national regulations concerning this product have to be checked before purchase of the product. Installation have to be done according to installation manual.

Approved by customer:

/ . 201



**WAVIN**  
Labbko 1 KANGASALA  
FIN-36240 FINLAND  
Tel. +358-(0)20-1285 200  
Fax +358-(0)20-1285 280  
www.wavin-labbko.fi