


View A – A:

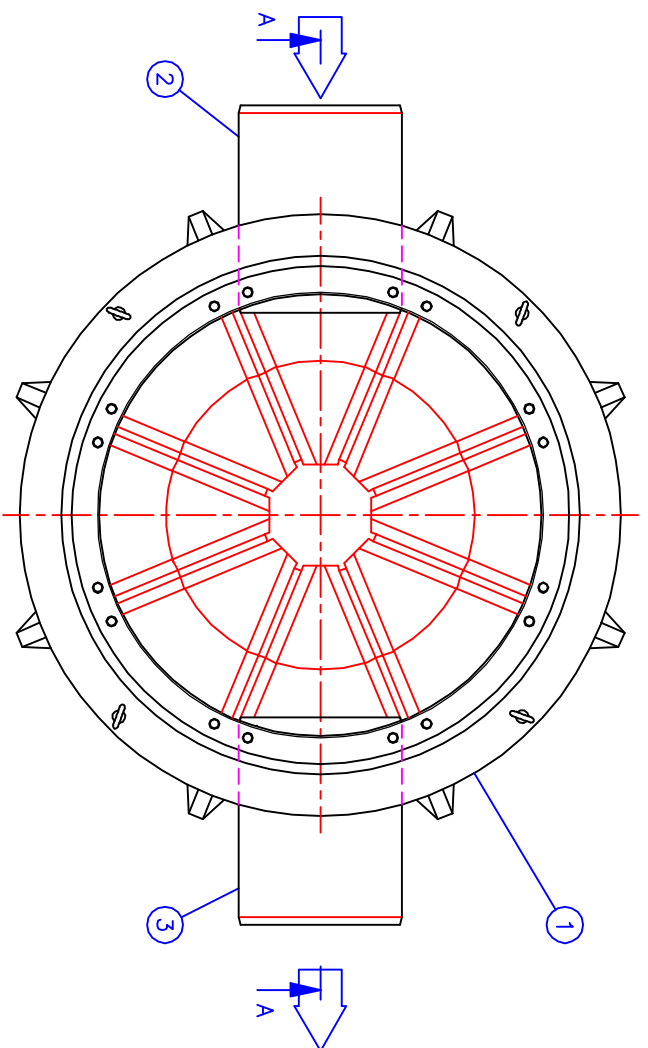

**Note!** Sampling shaft without manually operated shut-off valve

h = Separator connection height from ground (max. 2500 mm)

h = \_\_\_\_\_ mm

6	ACCESSORY: Floating adjustable cover ø600, Standard EN124 (1 pc.)			
	Cover class A15 (1.5 tn) (x)	<input type="checkbox"/>		
	Cover class C250 (25 tn)	<input type="checkbox"/>		
	Cover class D400 (40 tn)	<input type="checkbox"/>		
	Frame	<input type="checkbox"/>		
5	EuroHUK 600 maintenance shaft (as needed), material: PE-MD			1
	h = Separator connection height from ground (max. 2500 mm)			
	EuroHUK 600 h 9-13 (x)	<input type="checkbox"/>	PE-MD	h = 900...1300 mm
	EuroHUK 600 h13-17	<input type="checkbox"/>	PE-MD	h=1300...1700 mm
	EuroHUK 600 h17-21	<input type="checkbox"/>	PE-MD	h=1700...2100 mm
	EuroHUK 600 h21-25	<input type="checkbox"/>	PE-MD	h=2100...2500 mm
4	Ventilation outlet (as needed)		PE	D110
3	Outlet sewer		PE-HD	D315
2	Inlet sewer		PE-HD	D315
1	Material: PE-MD pH3-10/Heat endurance 50°C		PE-MD	ø1160, H=800 mm
			V = 200 l	

Tuotenumero: Piiirustuksen sisämitta:

EuroNOK PE Nordic DN315 Sampling shaft

Piiirustusloji: ASIJAASKUVA

Suunn. AL/JS	Tark. JP	Hyy. 15.10.10	Piiirno 40QB11_e	Piiivöys: 15.10.10	Mittakövy: 1
--------------	----------	---------------	------------------	--------------------	--------------



WAVIN-LABKO OY  
Labkote 1 KANGASALA  
puh. 020 1285200  
fax: 020 1285280  
www.wavin-labko.fi

Rakennus kohte:

Tämä kuva ja sen ratkaisut ovat Wavin-Labko Oy:n omaisuutta. Pidättämme oikeudet muutoksiin ilman ennakkoilmoitusta. Vironnaisvaatimukset tulee selvittää ennen tuotteen hankintaa. Tuotteet tulee asentaa osennusohjeen mukaisesti.