
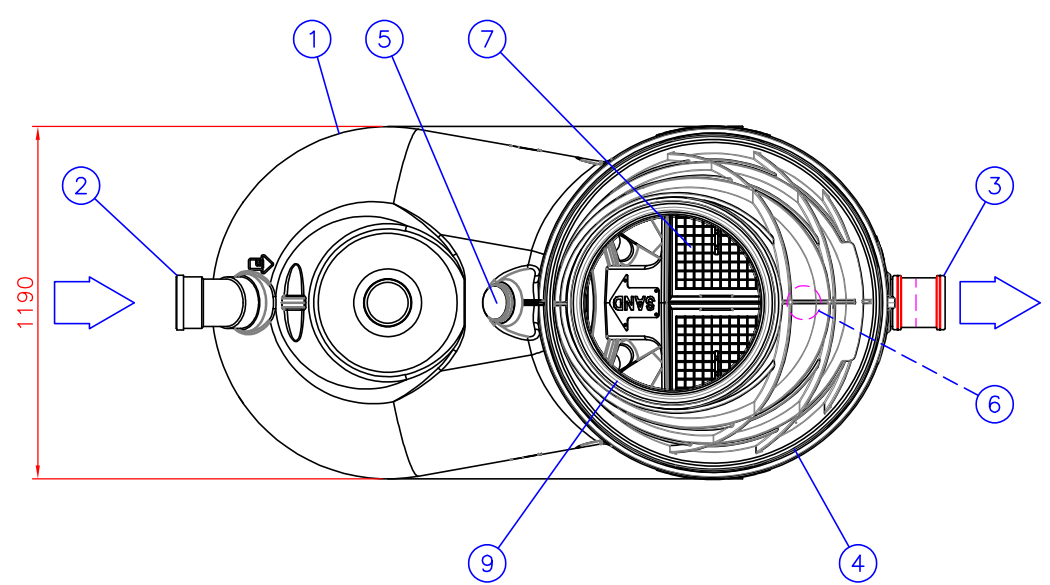



CERTARO NS10/1000 sand and oil separator
with TEGRA 600x1.5 M maintenance shaft
h = 1100 ... 3000 mm

(X)

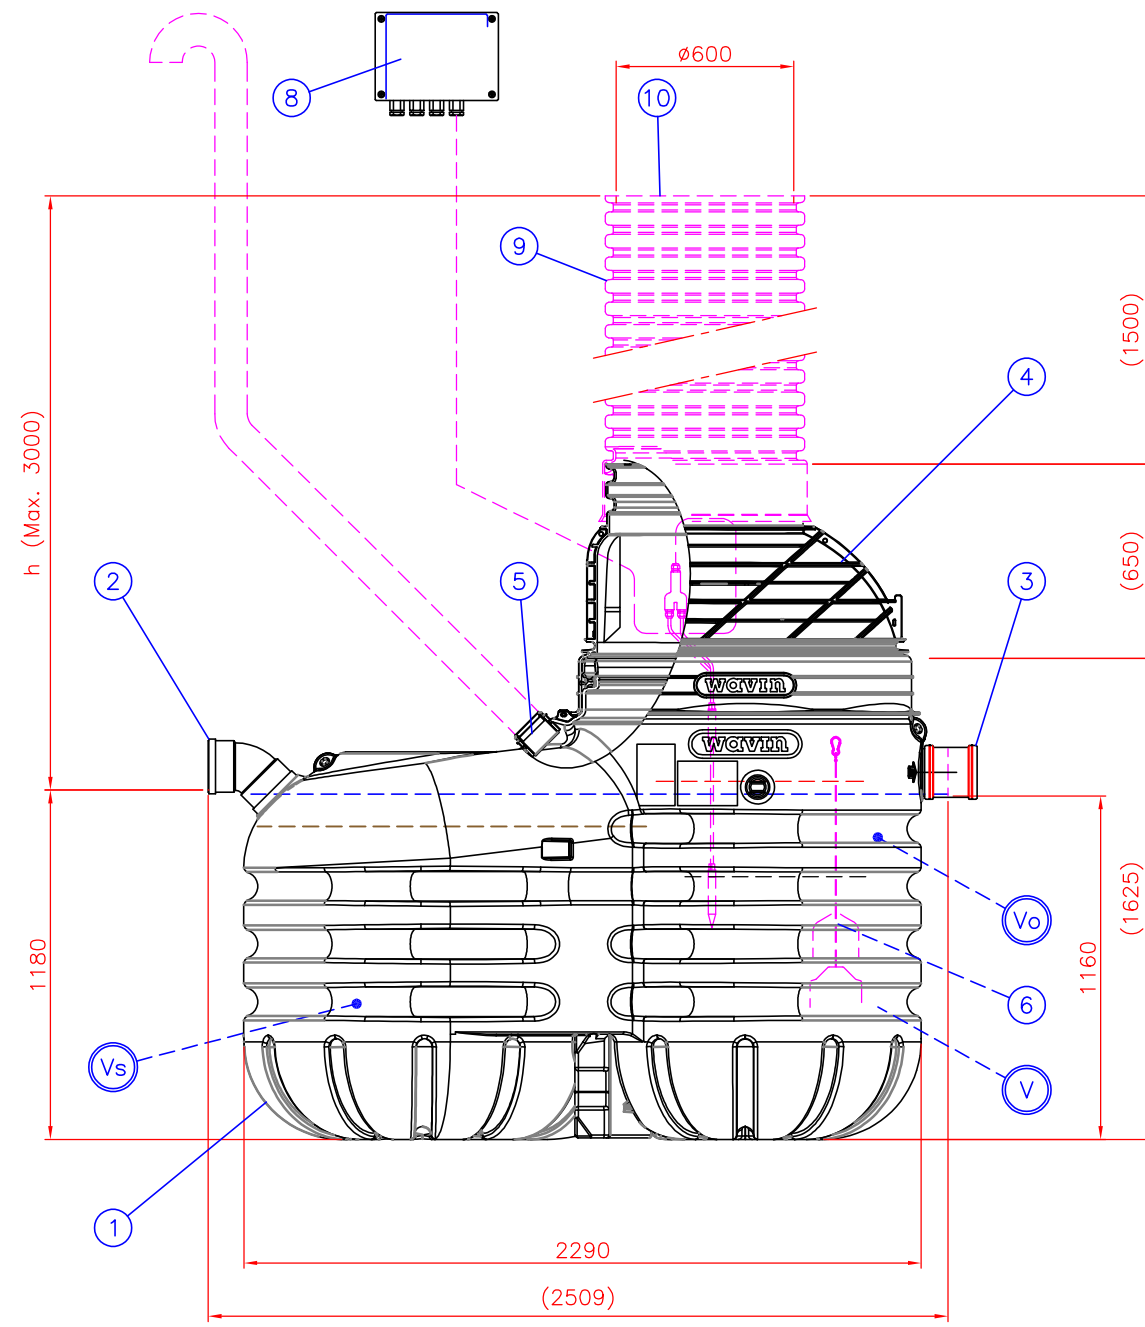

CERTARO NS10/1000 sand and oil separator
without TEGRA 600x1.5 M maintenance shaft
h = 1100 mm

(X)

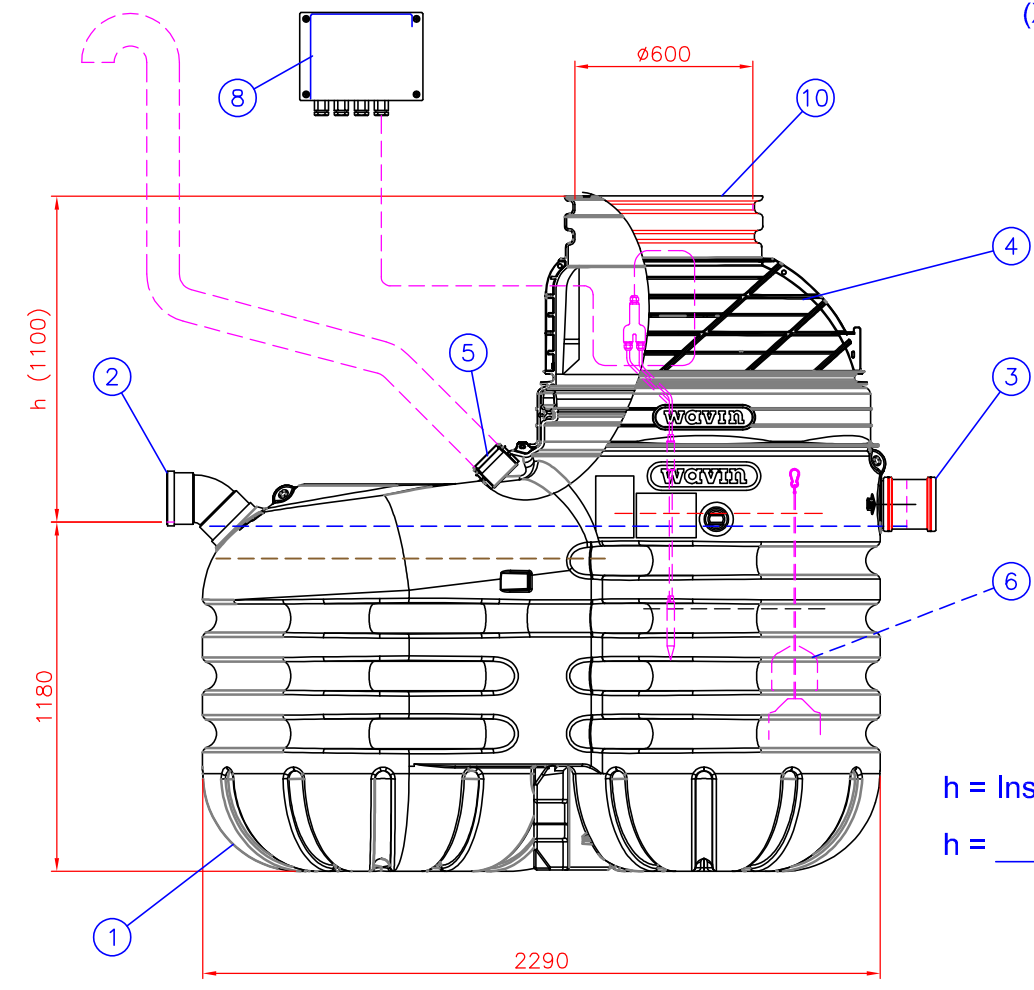


h = Installation height from inlet to ground surface
h = _____ (max. 3000 mm)

Maximum SLW60 (100kN/m²) traffic load if 1,0m hard surface coverage above inlet (water level).
Maximum groundwater level 2,5m above bottom of tank.
Max depth is 3,0m from cover down to inlet (water level).

Weight 300 kg

10	ACCESSORY: Cover (as needed)		(x)	<input type="checkbox"/>
9	ACCESSORY: TEGRA 600 maintenance shaft with socket and 600 sealing ring		(x)	<input type="checkbox"/>
8	Alarm system (central unit with oil surface and blockage detection probes)			
7	Coalescence filter unit			2
6	Automatic closure device	D160 (0.85–0.9g/cm ³)		1
5	Ventilation outlet	D110		1
4	TEGRA 1000/600 cone	D1100/600 H=650 mm		1
3	Outlet sewer	D160		1
2	Inlet sewer (with Socket)	D160		1
1	CERTARO NS10/1000 sand and oil separator	Length of tank: 2290 Flow capacity class-1: 10 l/s Material PE-MD, pH 3–10/Heat endurance max. 50°C	Height of tank: 1625 Width of tank: 1190	1
V	Total (wet) volume			2079 l
Vo	Oil storage in filter box: 140 liter and in total:			625 l
Vs	Sludge volume			1000 l

Title: CERTARO NS10/1000 sand and oil separator (3031093)		Drawing type CUSTOMER DRAWING		
Design by: AL/JS	Approved by: TaP 20.04.18	Drawing no. 23KB02br	Date: 20.04.2018	Scale:
Construction site:		 Wavin Sweden Kjulamon 6 SE-63506 ESKILSTUNA www.wavin.se wavin.se@wavin.com +46 (0) 16 - 541 0000		

This drawing and the technical information included in the drawing are property of Wavin-Labko.
All the national regulations concerning this product have to be checked before purchase of the product.
Installation have to be done according to installation manual.