


Q-Bic Plus

Product description

Geocellular unit for attenuation and infiltration tanks of rainwater.

The optimal solution for fastest installation and total access for inspection and cleaning.

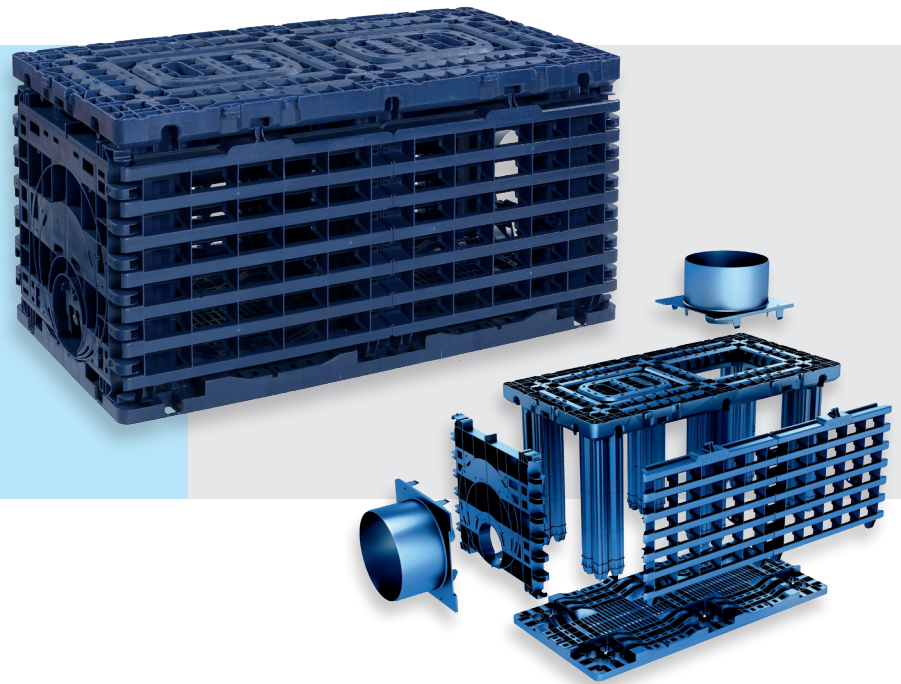

Technical information

⦿ Dimensions	Length [mm]	1200
	Width [mm]	600
	Height [mm]	600
	Gross volume [l] (without bottom)	454 (432)
	Void ratio [%]	95-96%
	Weight main unit [kg]	14
	Pipe connections [mm]	160-500
	Tank volume per truck [m ³]	<138
⦿ Window of Application*	Cover depth without traffic load [m]	0,30 - 4,45
	Cover depth with 1 ton wheel load [m]	0,30 - 4,45
	Cover depth with 10 tons wheel load [m]	0,75 - 4,40
⦿ Accessibility	Vertical access [mm]	350 x 240
	Width inspection channel [mm]	370
	Accessible surface area [%]	77%
⦿ General	Material	Virgin PP
	Color	Blue
	Connectors	Integrated
	Certifications	CSTB, DiBt, Komo, Benor, BBA

* General indication for installation above groundwater level, according to instructions for single layer tanks. For multi-layer tanks the window of application may be limited. Wavin always recommends a minimum cover of 0,3 meter. For specific projects seek advice of Wavin.