



Det. A - A:

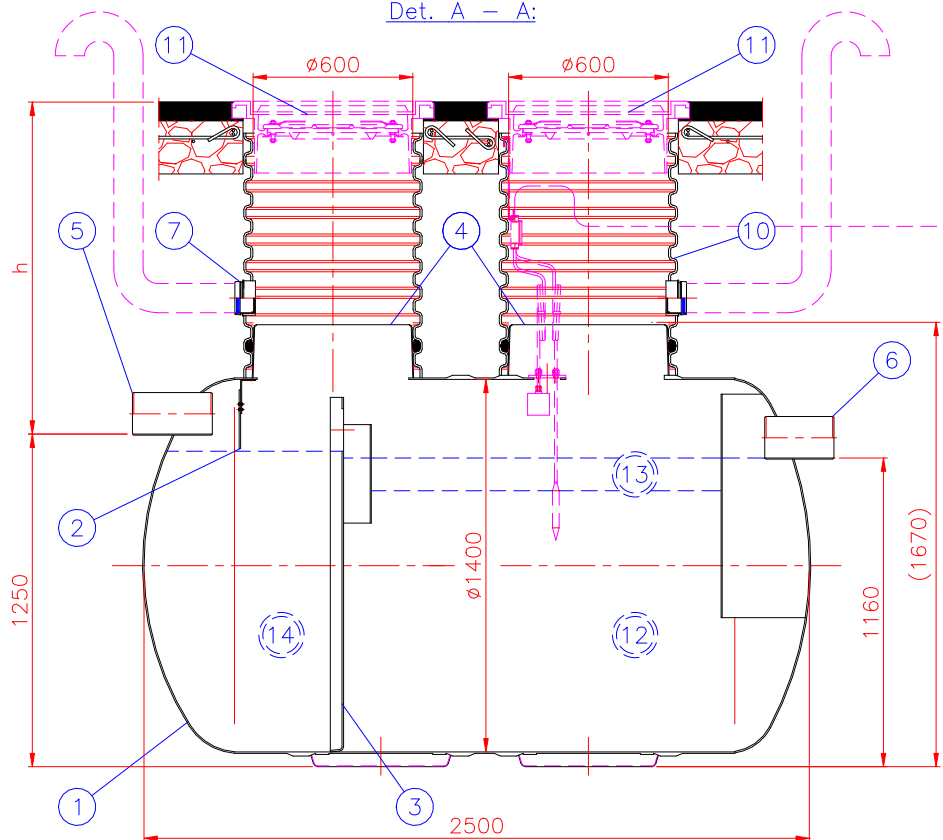


h=Vattengång inlopp till färdig mark

h= _____ mm (900...2500 mm)

Max. flöde: 7 l/s

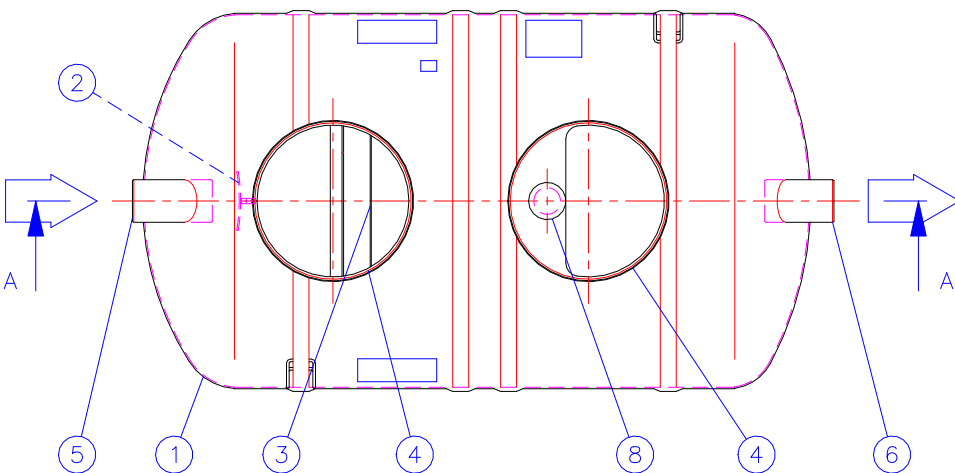

14	Lagringsvolym slam		840 l	
13	Lagringsvolym fett		290 l	
12	Effektiv volym		1800 l	
11	EXTRA UTRUSTNING: Gjutjärnsbetäckning $\varnothing 600$ (2 st), standard EN124			
	Lock klass A15 (1.5 tn) + ram	<input type="checkbox"/>		
	Lock klass C250 (25 tn) + ram	<input type="checkbox"/>		
	Lock klass D400 (40 tn) + ram	<input type="checkbox"/>		
10	EXTRA UTRUSTNING: PP-HUK Förhöjningshals, ($\varnothing 602/670$)			(2)
	h=Vattengång inlopp till färdig mark (Max. 2500 mm)			
	PP-HUK 600 h 9-13	<input type="checkbox"/>	PP	h= 900...1300 mm
	PP-HUK 600 h13-17	<input type="checkbox"/>	PP	h=1300...1700 mm
	PP-HUK 600 h17-21	<input type="checkbox"/>	PP	h=1700...2100 mm
	PP-HUK 600 h21-25	<input type="checkbox"/>	PP	h=2100...2500 mm
9	EXTRA UTRUSTNING: LABCOM kommunikationsenhet (x)	<input type="checkbox"/>		
8	EXTRA UTRUSTNING: Nivåalarm SET-2000 med SET DM/3 och SET/OS2 givare (x)	<input type="checkbox"/>		
7	Ventilation utlopp	PP	D110	2
6	Utlopp	PVC	D160	1
5	Inlopp	PVC	D160	1
4	Krage för PP-HUK 600	GAP	D600	2
3	Mellanvägg	GAP	D1400	1
2	Inloppsskärm	GAP		1
1	Material: GAP "Lasa Komposit", $\varnothing 1400$ L=2500 mm pH 3-10/max temp 80°C			1

Artikelnummer	Produkt namn: EuroFAM NS7 fettavskiljare med slamdel			Ritning typ: KUNDRITNING	
Designerad av: -/TL	Granskad av:	Godkänd av: HT 12.09.08	Arbetsnummer: 32GB02_r	Datum: 11.09.08	Skala:
			Projekt: SVERIGE		
Wavin Kjulamon 6 S-635 06 ESKILSTUNA SVERIGE Tel 016 - 541 00 00 Fax. 016 - 541 00 01					



This drawing and the technical information included in the drawing are property of Wavin-Labko. All the national regulations concerning this product have to be checked before purchase of the product. Installation have to be done according to installation manual.

Godkänd av:
____ / ____ 200__