


Indoor installation model (On the floor)

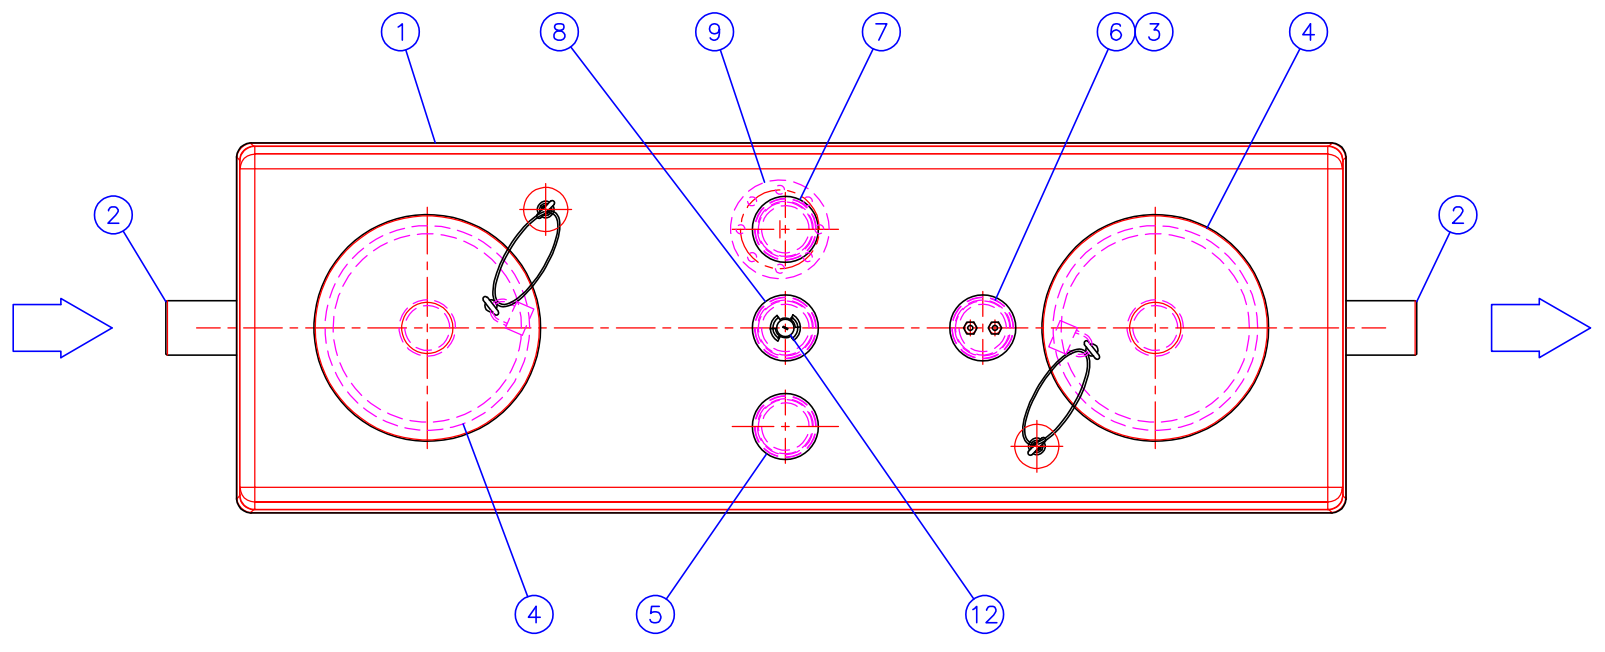

1	EuroREK NS4 SL GRP grease separator (EN1825), Indoor installation model Nominal size 4 l/s GRP body (750x1180, L=2250 mm) pH 3-10/Heat endurance continued 60°C (temporary max. 80°C)	1
	V Total volume	1470 l
	Vg Grease storage capacity	160 l (H=100 mm)
	Vs Sludge storage capacity	400 l
2	Inlet / Outlet sewer	D110
3	Grease alarm	1
4	Maintenance hole with odourproof cover	ø454/382 mm
5	Ventilation outlet	D110
6	Inlet for probes	D110
7	Inlet for Emptying pipe	D110
8	Inlet for Washing nozzle	D110

ACCESSORIES:	
9	Emptying pipe with flange, PVC, DN80 <input type="checkbox"/>
10	Imubox quick coupling box for 1 pc. DN80 Suction pipes <input type="checkbox"/>
11	Data Transfer Unit <input type="checkbox"/>
12	Washing nozzle <input type="checkbox"/>

Title: EuroREK NS4 SL GRP Grease separator (EN1825)			Drawing type CUSTOMER DRAWING	
Design by: HT/JS	Approved by: HT 18.04.2018	Drawing no. 32BB11be	Date: 18.04.2018	Scale:

	Construction site:		WAVIN-LABKO Ltd. VISIOKATU 1 FIN-33720 TAMPERE FINLAND tel. +358 20 1285200 fax. +358 20 1285280

This drawing and the technical information included in the drawing are property of Wavin-Labko. All the national regulations concerning this product have to be checked before purchase of the product. Installation have to be done according to installation manual.