


Indoor installation model (On the floor)

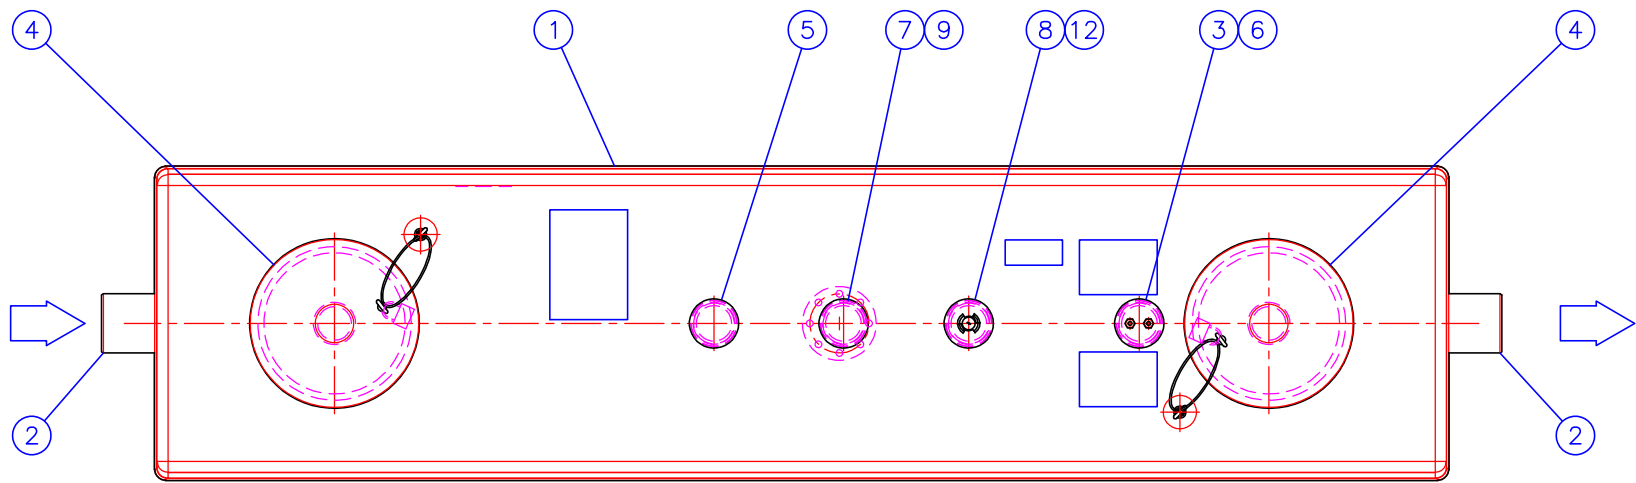

1	EuroREK NS7 SL GRP grease separator (EN1825), Indoor installation model		1
	Nominal size NS7 l/s		
	GRP body (850x1180, L=3500 mm)		
	pH 3-10/Heat endurance continued 60°C (temporary max. 80°C)		
V	Total volume	2450 l	
Vg	Grease storage capacity	280 l (H=100 mm)	
Vs	Sludge storage capacity	700 l	
2	Inlet / Outlet sewer	D160	1/1
3	Grease alarm		1
4	Maintenance hole with odourproof cover	ø454/382 mm	2
5	Ventilation outlet	D110	1
6	Inlet for probes	D110	1
7	Inlet for Emptying pipe	D110	1
8	Inlet for Washing nozzle	D110	1

ACCESSORIES:			
9	Emptying pipe with flange, PVC, DN80	(x)	<input type="checkbox"/>
10	Imubox quick coupling box for 1 pc. DN80 Suction pipes	(x)	<input type="checkbox"/>
11	Data Transfer Unit	(x)	<input type="checkbox"/>
12	Washing nozzle	(x)	<input type="checkbox"/>

Title: EuroREK NS7 SL GRP Grease separator (EN1825)			Drawing type CUSTOMER DRAWING	
Design by: HT/JS	Approved by: HT 18.04.2018	Drawing no. 32BB21ae	Date: 18.04.2018	Scale:

	Construction site:		WAVIN-LABKO Ltd. VISIOKATU 1 FIN-33720 TAMPERE FINLAND tel. +358 20 1285200 fax. +358 20 1285280

This drawing and the technical information included in the drawing are property of Wavin-Labko. All the national regulations concerning this product have to be checked before purchase of the product. Installation have to be done according to installation manual.