



PE electrolasmoffen

PE 100 SDR 11

Materiaal:


HDPE

Uitvoering:

PE100 SDR 11 (ISO S5)

10 bar gas / 16 bar water

FICHE N°:	
Bedrijf:	
Project:	
Datum:	

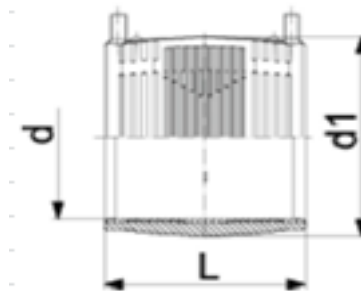

d	Gewicht	L	d1	art. nummer
mm	Kg	mm	mm	
75	0,282	110	96	6150007500
90	0,406	125	113	6150009000
110	0,692	145	138	6150007500
125	0,718	156	154	6150011000
140	0,945	166	172	6150014000
160	1,362	180	196	6150016000
180	1,747	192	219	6150018000
200	1,866	208	244	6150020000
225	3,329	225	273	6150022500
250	4,678	248	304	6150025000
280	5,647	252	340	6150028000
315	8,142	267	382	6150031500
355	13,098	290	432	6150035500
400	18,32	290	487	6150040000

Omschrijving

4 mm stekkeraansluiting

begrensde lasindicator

verwijderbare middenaanslag tot d160

Afmetingen en gewichten onder voorbehoud van wijzigingen



Manchons électrosoudables PE 100 SDR 11


Matériaux

PEHD

Exécution

- PE 100 SDR 11 (ISO S5)
- 10 bar gaz / 16 bar eau

FICHE N°:	
Société	
Projet:	
Date:	

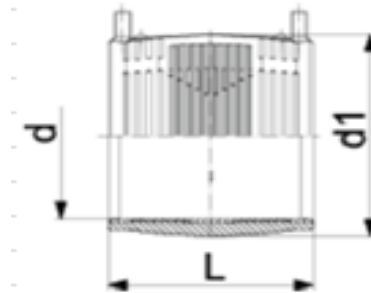

d mm	Poids Kg	L mm	d1 mm	N° article
75	0,282	110	96	6150007500
90	0,406	125	113	6150009000
110	0,692	145	138	6150007500
125	0,718	156	154	6150011000
140	0,945	166	172	6150014000
160	1,362	180	196	6150016000
180	1,747	192	219	6150018000
200	1,866	208	244	6150020000
225	3,329	225	273	6150022500
250	4,678	248	304	6150025000
280	5,647	252	340	6150028000
315	8,142	267	382	6150031500
355	13,098	290	432	6150035500
400	18,32	290	487	6150040000

Description

- connecteurs 4 mm
- indicateur de soudage
- butée centrale amovible jusqu'à d160

Dimensions et poids sont donnés à titre indicatif et sous réserve de changements